

Basic spoke Leader

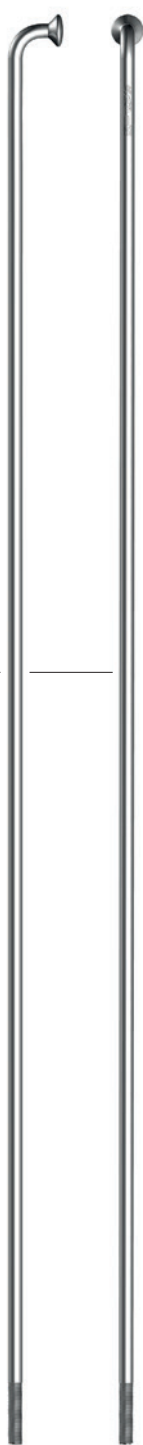

Diameter:

Gauge
15G - 1.8 mm
14G - 2.0 mm
13G - 2.3 mm
12G - 2.6 mm
11G - 2.9 mm

Standard: \varnothing 2,0 mm

Others: \varnothing 1,8/2,3/2,6/2,9 mm

Length: 145 - 310 mm

Usage: City, Trekking, MTB, Tandem, Moped

Weight: 14G: 431 g (64 x 260 mm) | 13G: 569 g (64 x 260 mm)


Strength on middle section: 1080 - 1180 N/mm²

Packaging quantities: 100, 1500

Nipples: 12 mm brass Polyax

Basic spoke

Zinc

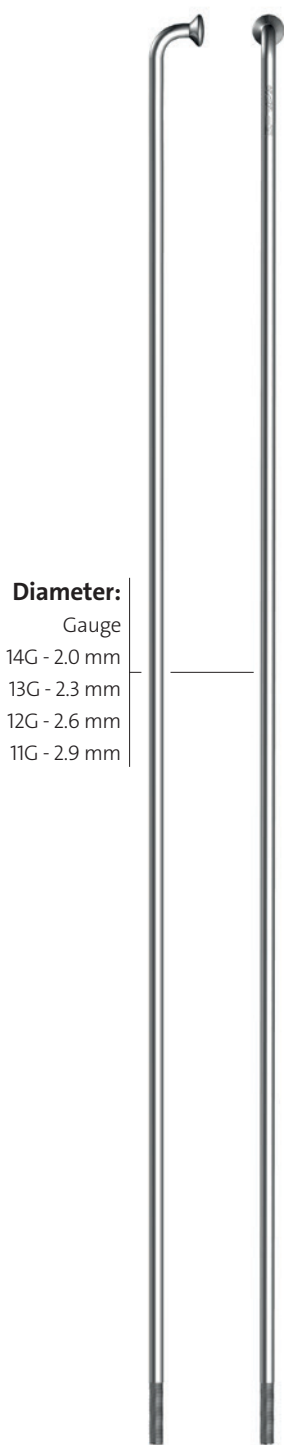

Standard: \varnothing 2,0 mm

Others: \varnothing 2,3/2,6/2,9 mm

Length: 145 - 310 mm

Usage: City

Weight: 14G: 431 g (64 x 260 mm) | 13G: 569 g (64 x 260 mm)

Fatigue test wheel revolutions: 870.000


Strength on middle section: 1100 - 1200 N/mm²

Packaging quantities: 144, 1500

Nipples: 12 mm brass Polyax

Butted spoke

Race

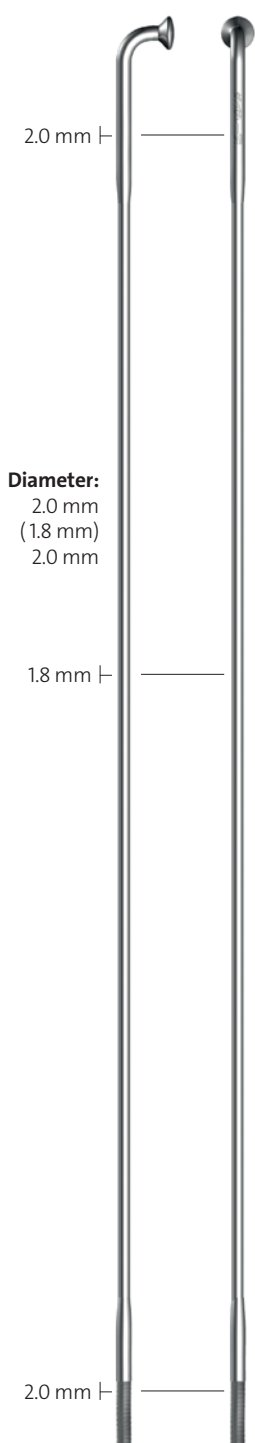

INOX 18/8: Ø 2,0 - 1,8 - 2,0 mm

Length: 145 - 310 mm

Usage: Race, Triathlon, MTB, Trekking

Weight: 363 g (64 pcs x 260 mm)


Strength on middle section: 1300 N/mm²

Packaging quantities: 100, 500, 1500

Nipples: 12 mm brass Polyax

Butted spoke

Strong

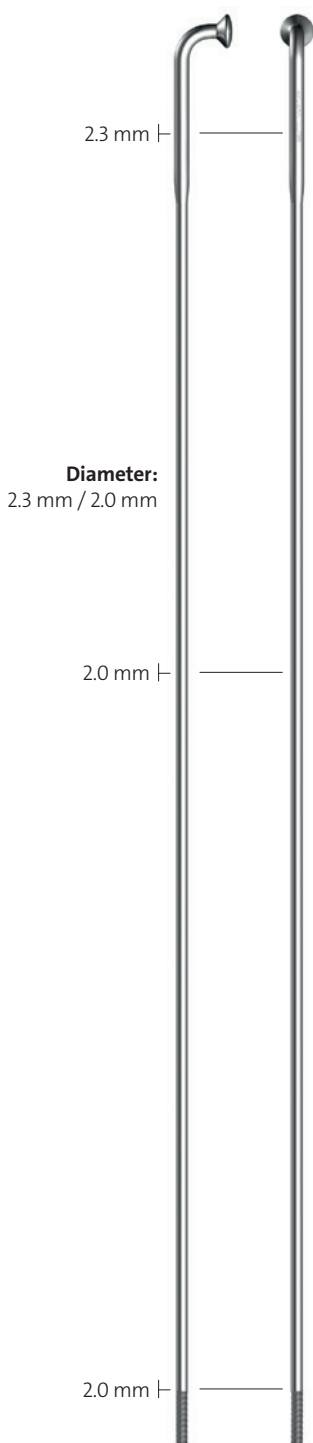

INOX 18/8: Ø 2,3 - 2,0 mm

Length: 145 - 310 mm

Usage: Downhill, Trekking, City, MTB


Weight: 14G: 446 g (64 pcs x 260 mm)

Strength on middle section: 1250 N/mm²

Packaging quantities: 100, 500, 1500

Nipples: 12 mm brass Polyax

Butted spoke D-light

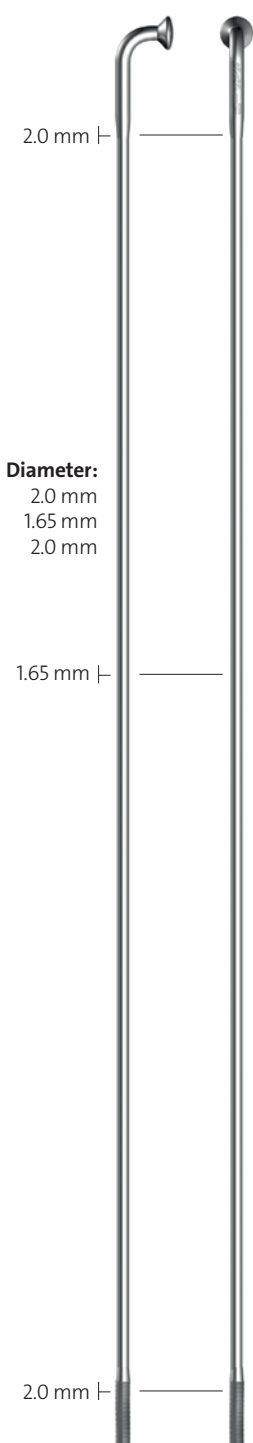

INOX 18/8: Ø 2,0 - 1,65 mm - 2,0 mm

Length: 145 - 310 mm

Usage: Race/Trial, MTB, Downhill

Weight: 307 g (64 pcs x 260 mm)


Strength on middle section: 1370 N/mm²

Packaging quantities: 100, 500, 1500

Nipples: 12 mm brass Polyax

Butted spoke

Laser

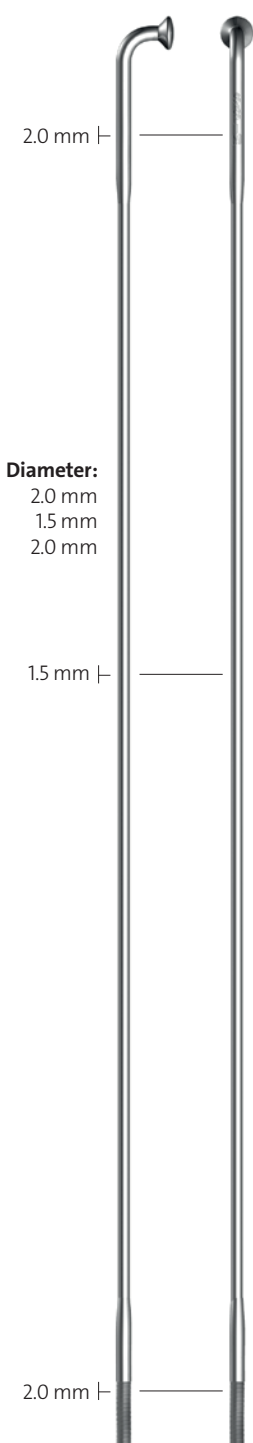

INOX 18/8: Ø 2,0 - 1,5 mm - 2,0 mm

Length: 145 - 310 mm

Usage: Race/Trial, MTB

Weight: 283 g (64 pcs x 260 mm)


Strength on middle section: 1500 N/mm²

Packaging quantities: 50, 500, 1500

Nipples: 12 mm brass Polyax

Butted spoke

Force

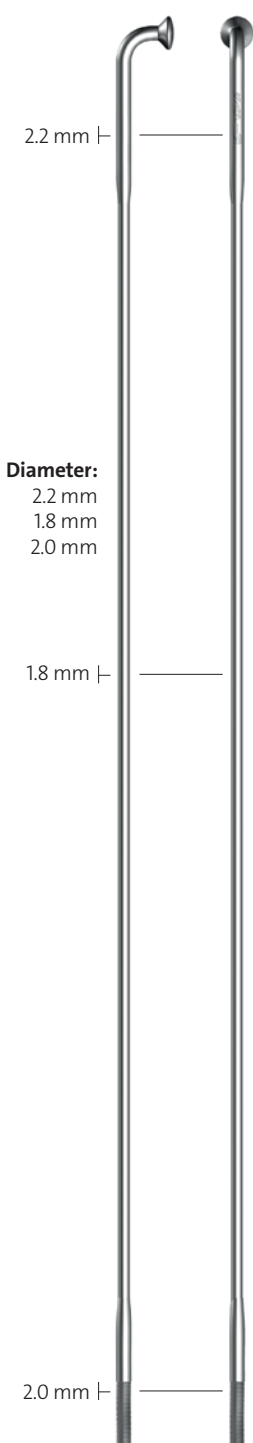

INOX 18/8: Ø 2,2 - 1,8 mm - 2,0 mm

Length: 145 - 310 mm

Usage: BMX, Downhill, Trekking, Cargo, E-bikes


Weight: 377 g (64 pcs x 260 mm)

Strength on middle section: 1350 N/mm²

Packaging quantities: 100, 500, 1500

Nipples: 12 mm brass Polyax

Aero spoke CX-Ray

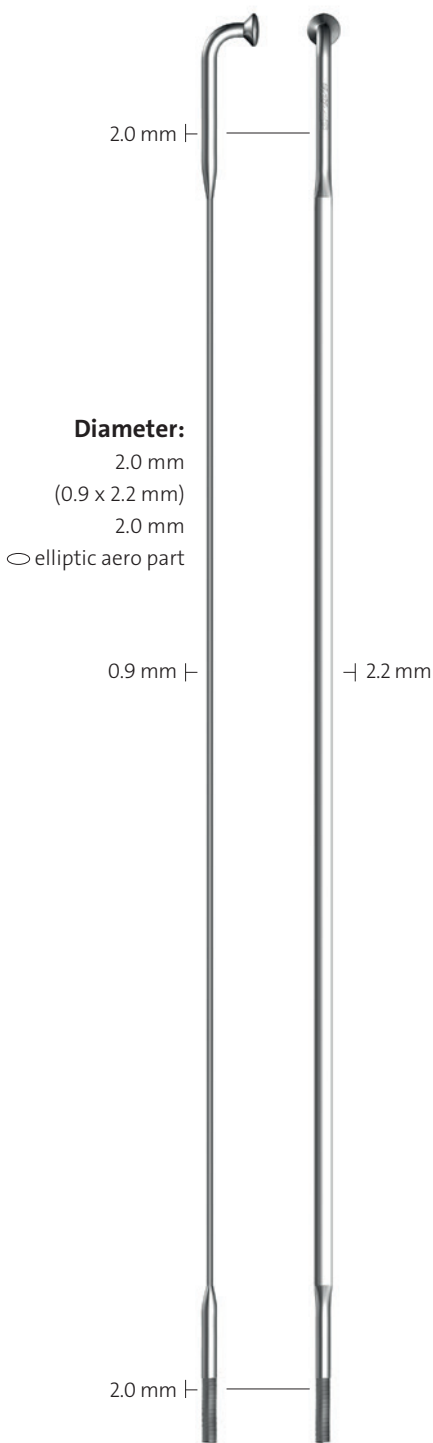

INOX 18/8: Ø 2.0 mm (0.9 x 2.2 mm) 2.0 mm

○ elliptic aero part

Length: 145 - 310 mm

Usage: Race/Trial, MTB, BMX, Downhill


Weight: 279 g (64 pcs x 260 mm)

Strength on middle section: 1600 N/mm²

Packaging quantities: 20, 500, 1500

Nipples: 14 mm aluminium Polyax

Aero spoke CX-Sprint

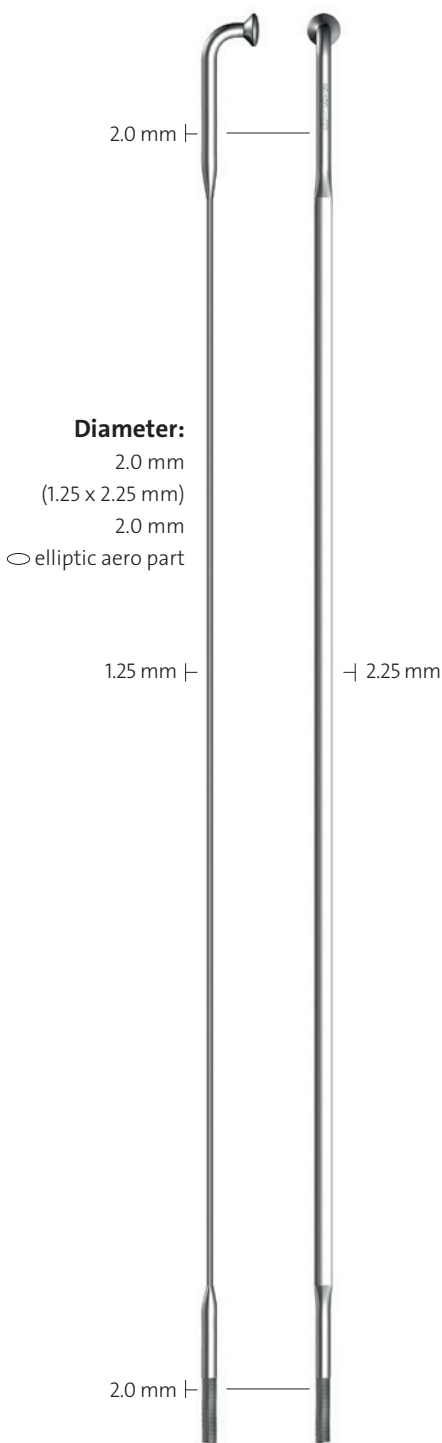

INOX 18/8: Ø 2.0 mm (1.25 x 2.25 mm) 2.0 mm

○ elliptic aero part

Length: 145 - 310 mm

Usage: Race/Trial, MTB, BMX, Downhill

Weight: 334 g (64 pcs x 260 mm)

Strength on middle section: 1430 N/mm²

Packaging quantities: 20, 500, 1500

Nipples: 14 mm aluminium Polyax